CITY OF WEST DES MOINES
CITY COUNCIL MEETING COMMUNICATION

4(I)2

ITEM: **DATE:** **February 8, 2016**

Resolution - Ordering Construction
2015 Channel Repair Program

FINANCIAL IMPACT:

The Engineering Estimate of Construction Cost for the 2015 Channel Repair Program is $100,000.00. All costs for these services can be paid from budgeted account no. 5550.80.820.6.7910 with ultimate funding coming from stormwater utility fees.

BACKGROUND:

A Bid Letting should be scheduled for 2:00 p.m. on Wednesday, February 17, 2016, and a Public Hearing on the project should be scheduled for 5:35 p.m. on Monday, February 22, 2016. The contract would be awarded on Monday, February 22, 2016, and work will begin shortly thereafter.

The work includes bank repair and stabilization of Jordan Creek adjacent to the Jordan Creek Trail at two locations between 50th Street and 60th Street. The project is scheduled to be completed by September 30, 2016.

OUTSTANDING ISSUES:

None

RECOMMENDATION:

City Council Adopt:

- Resolution Ordering Construction of the 2015 Channel Repair Program.
- Fixing 2:00 p.m. on Wednesday, February 17, 2016, as time and date for project Bid Letting.
- Ordering the City Clerk to publish notice of Letting and Public Hearing.

Lead Staff Member: **Duane C. Wittstock, P.E., L.S., City Engineer**

STAFF REVIEWS

Department Director	Duane C. Wittstock, City Engineer
Appropriations/Finance	Tim Stiles, Finance Director
Legal	Richard Scieszinski, City Attorney
Agenda Acceptance	RTJ

PUBLICATION(S) (if applicable)

Published In	
Dates(s) Published	

SUBCOMMITTEE REVIEW (if applicable)

Committee	Public Works		
Date Reviewed	February 1, 2016		
Recommendation	Yes	No	Split

Resolution Ordering Construction and
Notice of Public Hearing on Plans, Specifications, Form of Contract, Estimate of Cost, and Directing Advertisement for Bids

BE IT RESOLVED BY THE CITY COUNCIL OF THE CITY OF WEST DES MOINES, IOWA, that the following described public improvement:

2015 Channel Repair Program
Project No. 0510-022-2015

is hereby ordered constructed according to the Plans and Specifications prepared by the Engineering Division of the City of West Des Moines and now on file in the office of City Clerk.

BE IT FURTHER RESOLVED, that the detailed Plans and Specifications, Form of Contract, Bid Security, and Notice to Bidders are hereby approved, subject to hearing thereon, and that the same are now on file in the office of City Clerk for public inspection.

BE IT FURTHER RESOLVED, that the City Clerk is hereby directed to publish notice of hearing on the Plans and Specifications, Form of Contract, Bid Security and Estimate of Costs for said project to be held at 5:35 p.m. on Monday, February 22, 2016, with said notice published not less than four (4) days nor more than twenty (20) days prior to the date heretofore fixed.

BE IT FURTHER RESOLVED, that the City Clerk is hereby directed to publish Notice to Bidders for said project with publication not less than four (4) days nor more than forty-five (45) days prior to the date for receiving bids. Said bids are to be filed prior to 2:00 p.m. on Wednesday, February 17, 2016.

BE IT FURTHER RESOLVED, that the bids received for construction of said improvements will be opened, publicly read and tabulated by the City Clerk, Deputy City Clerk, or City Clerk designee at 2:00 p.m. on Wednesday, February 17, 2016, and the results of said bids shall be considered at a meeting of this Council on Monday, February 22, 2016, at 5:35 p.m. and acted upon at said time, or such time as may then be fixed.

PASSED AND APPROVED this **8th** day of **February, 2016.**

_____
Steven K. Gaer, Mayor

ATTEST:

_____
Ryan T. Jacobson, City Clerk

2015 Channel Repair Program - Jordan Creek
Opinion of Probable Construction Cost
City of West Des Moines
Project No. 0510-022-2015
2/3/2016

ITEM NO.	DESCRIPTION	UNIT	Quantity			Unit Price	Total Cost
			Praire View	50th	TOTAL		
1	CLEARING AND GRUBBING	LS	-	-	1	$ 12,000.00	$ 12,000.00
2	CONSTRUCTION STAKING	LS	-	-	1	$ 6,000.00	$ 6,000.00
3	TRAFFIC CONTROL	LS	-	-	1	$ 10,000.00	$ 10,000.00
4	EXCAVATION, CLASS 10	CY	210	90	300	$ 30.00	$ 9,000.00
5	REMOVE AND REPLACE REC TRAIL, HMA. 6"	SY	-	40	40	$ 120.00	$ 4,800.00
6	REMOVE AND REPLACE REC TRAIL, PCC. 6"	SY	10	65	75	$ 120.00	$ 9,000.00
7	TOE PROTECTION STONE, CLASS 'D' REVETMENT	TON	160	240	400	$ 70.00	$ 28,000.00
8	CHOKE STONE	TON	40	60	100	$ 35.00	$ 3,500.00
9	STABILIZED CONSTRUCTION ENTRANCE	TON	40	40	80	$ 35.00	$ 2,800.00
10	EROSION MATTING	SY	480	220	700	$ 10.00	$ 7,000.00
11	SEEDING AND FERTILIZING	AC	1	1	2	$ 2,500.00	$ 5,000.00
12	MULCHING	AC	1	1	2	$ 1,500.00	$ 3,000.00
OPINION OF PROBABLE CONSTRUCTION COST							$ 100,000.00

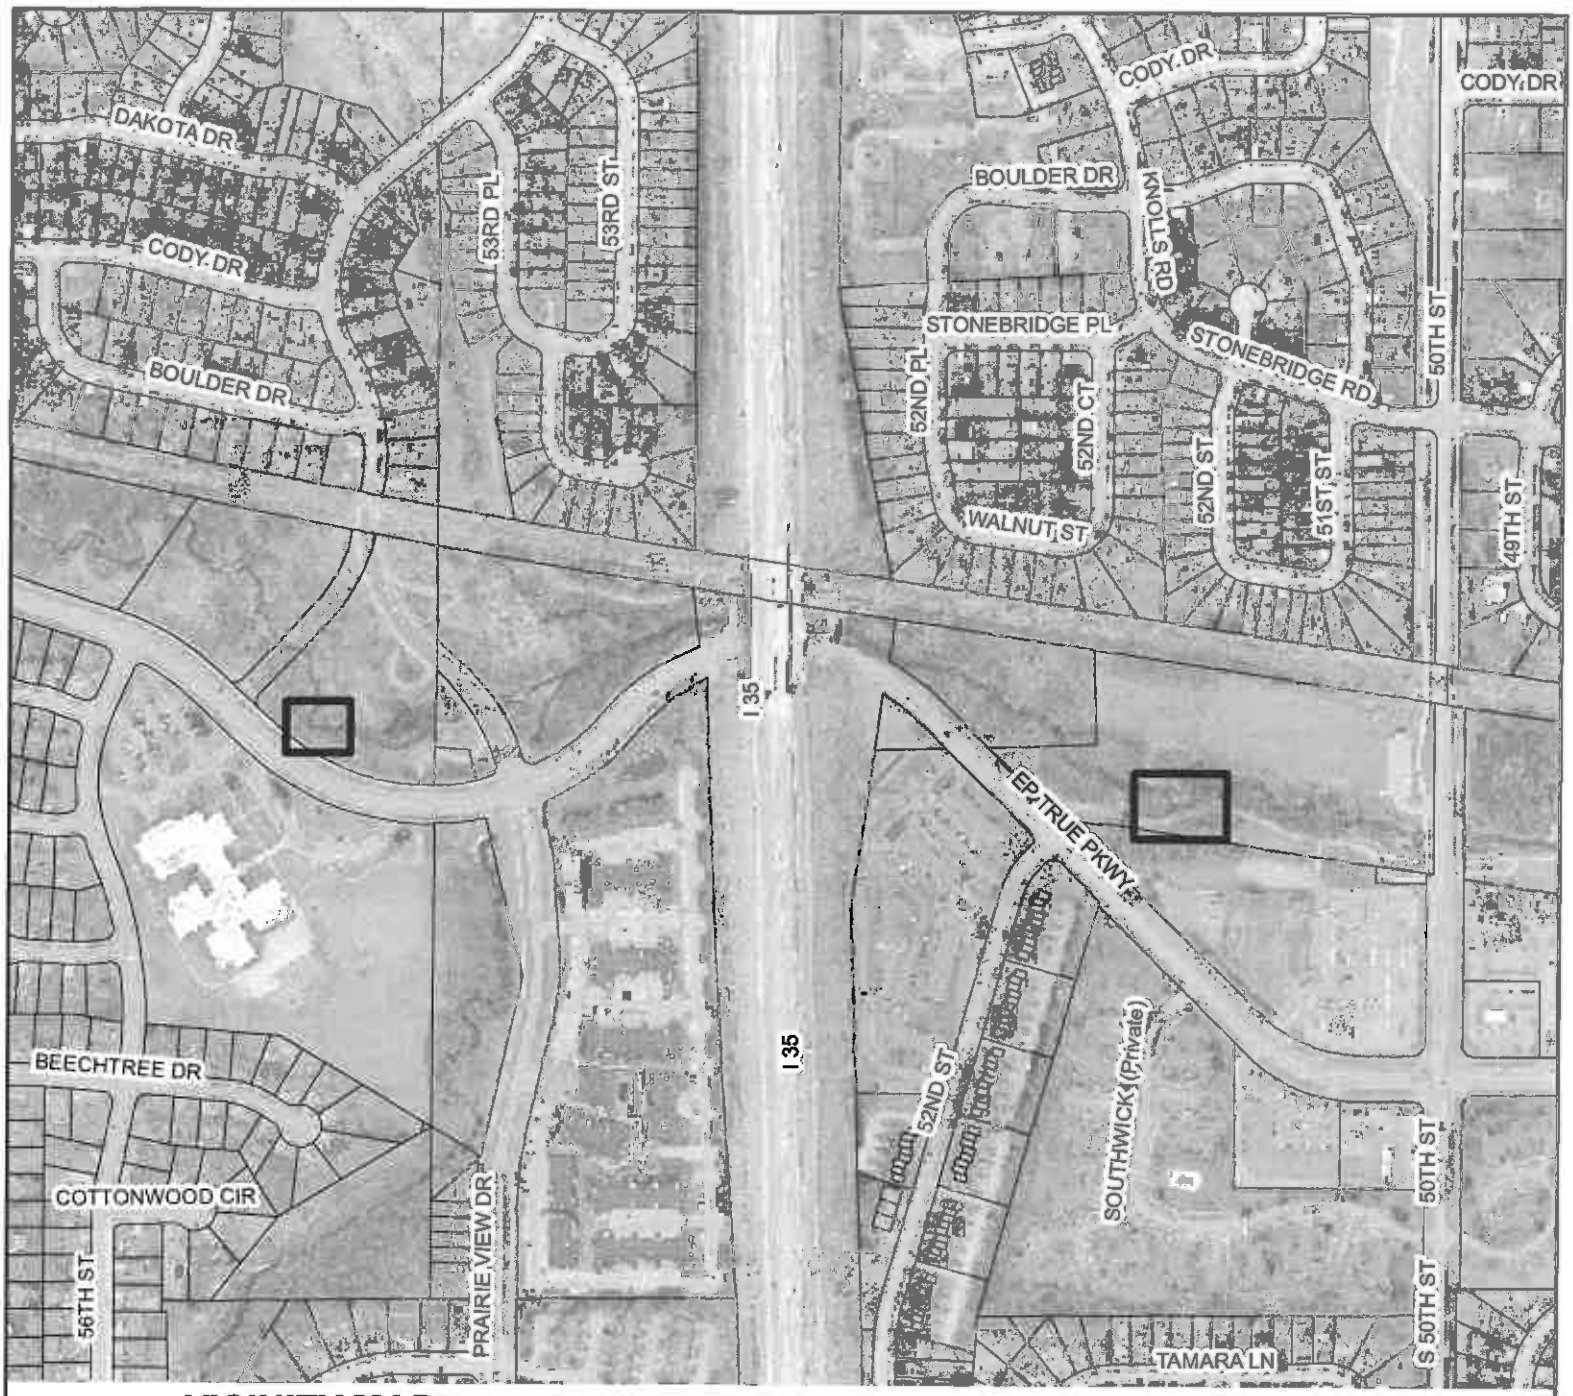

VICINITY MAP

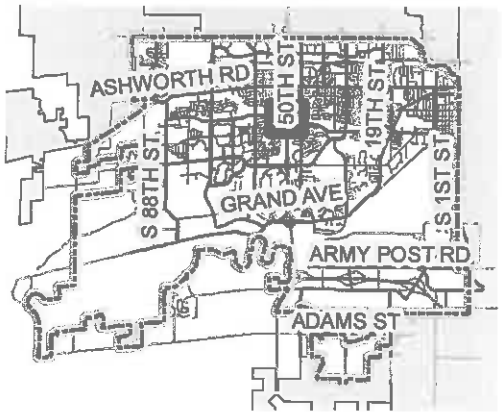

N

LEGEND

PROJECT LOCATION ———

CITY OF WEST DES MOINES
ENGINEERING SERVICES
4200 MILLS CIVIC PARKWAY
WEST DES MOINES, IOWA 50265
PH: (515) 222-3620 FAX: (515) 273-0602

PROJECT: **2015 CHANNEL REPAIR PROGRAM**		**Project No. 0510-022-2015**
LOCATION: **EXHIBIT "A"**		
DRAWN BY: BJM	DATE: 6/23/2015	SHT. 1 OF 1