4(q)3

CITY OF WEST DES MOINES
CITY COUNCIL MEETING COMMUNICATION

DATE: **May 2, 2016**

ITEM:

Resolution - Ordering Construction
Veterans Parkway Phase 4 – SE Pine Avenue Trail
Veterans Parkway to SE Soteria Avenue
IDOT No. STP-U-8260(633)-70-77

FINANCIAL IMPACT:

The engineering estimate of construction cost for the Veterans Parkway Phase 4 – SE Pine Avenue Trail is $526,332.50. Payments will be made from budgeted account number 4070.75.820.6.7910 with the ultimate funding intended to come from Road Use Tax funds for the local share and Surface Transportation Program funds for the federal aid share.

BACKGROUND:

A Bid Letting at the IDOT is scheduled for Tuesday, May 17, 2016. A Public Hearing on the project should be scheduled for 5:35 p.m. on Tuesday, May 31, 2016. The contract would be awarded on Tuesday, May 31, 2016 subject to IDOT concurrence, and work will begin shortly thereafter.

This project is the last of four phases of construction of Veterans Parkway. A new trail will be extended from Veterans Parkway to the Great Western Trail near the intersection of SE Pine Avenue and SE Soteria Avenue. Work also includes construction of a trailhead and parking area in the southwest corner of the intersection.

OUTSTANDING ISSUES:

None.

RECOMMENDATION:

City Council Adopt:

- Resolution Ordering Construction of the Veterans Parkway Phase 4 – SE Pine Avenue Trail
- Fixing 10:30 a.m. on Tuesday, May 17, 2016, as time and date for project Bid Letting.
- Ordering the City Clerk to publish notice of Letting and Public Hearing.

Lead Staff Member: **Duane C. Wittstock, P.E., L.S., City Engineer**

DCW

STAFF REVIEWS

Department Director	Duane C. Wittstock, City Engineer
Appropriations/Finance	Tim Stiles, Finance Director
Legal	Richard Scieszinski, City Attorney
Agenda Acceptance	RTG

PUBLICATION(S) (if applicable)

Published In	
Dates(s) Published	

SUBCOMMITTEE REVIEW (if applicable)

Committee	Public Works		
Date Reviewed	April 25, 2016		
Recommendation	Yes	No	Split

Resolution Ordering Construction and Notice of Public Hearing on Plans, Specifications, Form of Contract, Estimate of Cost, and Directing Advertisement for Bids

BE IT RESOLVED BY THE CITY COUNCIL OF THE CITY OF WEST DES MOINES, IOWA, that the following described public improvement:

Veterans Parkway Phase 4 – SE Pine Avenue Phase 4
Project No. 0510-021-2013

is hereby ordered constructed according to the Plans and Specifications prepared by the City of West Des Moines and now on file in the office of City Clerk.

BE IT FURTHER RESOLVED, that the detailed Plans and Specifications, Form of Contract, Bid Security, and Notice to Bidders are hereby approved, subject to hearing thereon, and that the same are now on file in the office of City Clerk for public inspection.

BE IT FURTHER RESOLVED, that the City Clerk is hereby directed to publish notice of hearing on the Plans and Specifications, Form of Contract, Bid Security and Estimate of Costs for said project to be held at 5:35 p.m. on May 31, 2016, with said notice published not less than four (4) days nor more than twenty (20) days prior to the date heretofore fixed.

BE IT FURTHER RESOLVED, that prospective actions by the City Clerk in publishing a Notice to Bidders for said project (publication to be not less than four (4) days nor more than forty-five (45) days prior to the date for receiving bids) are hereby approved. Said bids are to be filed prior to the time appointed and location indicated by the Iowa Department of Transportation on Tuesday, May 17, 2016.

BE IT FURTHER RESOLVED, that the bids received for construction of said improvements will be opened, publicly read and tabulated by the Iowa Department of Transportation at the appointed time on Tuesday, May 17, 2016, and the results of said bids shall be considered at a meeting of this Council on Tuesday, May 31, 2016 at 5:35 p.m. and acted upon at said time, or such time as may then be fixed.

PASSED AND APPROVED this **2nd** day of **May, 2016.**

_____
Steven K. Gaer, Mayor

ATTEST:

_____
Ryan T. Jacobson, City Clerk

OPINION OF PROBABLE PROJECT COST

SW CONNECTOR - PHASE 4
FROM VETERN'S PARKWAY TO THE GREAT WESTERN TRAIL
WEST DES MOINES, IOWA
PROJECT NO. STP-U-8260(633)--70-77
January 2015

ITEM NO.	ITEM DESCRIPTION	UNIT	QUANTITY	UNIT COST	TOTAL
	TRAIL CONSTRUCTION				
1	CLASS 10,	CY	7507	15.00	$ 112,605.00
2	TOP SOIL STRIP SALVAGE AND RESPREAD	CY	1499	20.00	$ 29,980.00
3	COMPACTION WITH M&D	CY	350	10.00	$ 3,500.00
4	SPECIAL COMPACTION OF SUBGRADE	STA	27.1	1,000.00	$ 27,100.00
5	REMOVAL OF CURB	STA	0.6	$3,500.00	$ 2,100.00
6	PORTLAND CEMENT CONCRETE PAVEMENT, CLASS C, CLASS 3 DURABILITY, 7 IN.	SY	650	60.00	$ 39,000.00
7	PCC Sample	LS	1	1,500.00	$ 1,500.00
8	REMOVAL OF Concrete	SY	11	15.00	$ 165.00
9	APRONS, CONCRETE. 15 IN. DIA.	EA	1	1,800.00	$ 1,800.00
10	INTAKE, SW-501	EA	1	3,000.00	$ 3,000.00
11	INTAKE, SW-505	EA	1	4,500.00	$ 4,500.00
12	INTAKE, SW-505, MODIFIED	EA	1	5,000.00	$ 5,000.00
13	MANHOLE ADJUSTMENT, MAJOR	EA	1	2,000.00	$ 2,000.00
14	STORM SEWER GRAVITY MAIN, TRENCHED, REINFORCED CONCRETE PIPE (RCP),	LF	98	95.00	$ 9,310.00
15	RECREATIONAL TRAIL, PORTLAND CEMENT CONCRETE, 6 IN.	SY	3375	55.00	$ 185,625.00
16	DETECTABLE WARNINGS	SF	8	45.00	$ 360.00
17	FENCE, SAFETY	LF	250	15.00	$ 3,750.00
18	CONSTRUCTION SURVEY	LS	1	3,500.00	$ 3,500.00
19	PAINTED PAVEMENT MARKING	STA	1.5	100.00	$ 150.00
20	PAINTED SYMBOLS	EA	1	250.00	$ 250.00
21	TRAFFIC CONTROL	LS	1	5,000.00	$ 5,000.00
22	MOBILIZATION	LS	1	50,000.00	$ 50,000.00
23	RELOCATION OF FIRE HYDRANT	LS	1	5,000.00	$ 5,000.00
24	MULCHING	AC	4.25	2,000.00	$ 8,500.00
25	SEEDING AND FERT.(RURAL)	AC	1.75	1,500.00	$ 2,625.00
26	SEEDING AND FERT.(URBAN)	AC	2.5	2,000.00	$ 5,000.00
27	SEEDING AND FERT.(STABILIZATION)	AC	2.5	1,000.00	$ 2,500.00
28	SILT FENCE	LF	1000	2.00	$ 2,000.00
29	REMOVAL OF PERIMETER AND SLOPE SEDIMENT CONTROL DEVICE, 12 IN. DIA.	LF	1000	0.50	$ 500.00
30	MAINTANENCE OF SILT FENCE	LF	1000	0.50	$ 500.00
30	PERIMETER AND SLOPE SEDIMENT CONTROL DEVICE, 12 IN. DIA.	LF	1575	3.00	$ 4,725.00
31	REMOVAL OF PERIMETER AND SLOPE SEDIMENT CONTROL DEVICE, 12 IN. DIA.	LF	1575	0.50	$ 787.50
32	MOBILIZATION. EROSION CONTROL	EA	4	500.00	$ 2,000.00
33	MOBILIZATION, EMERGENCY EROSION CONTROL	EA	2	1,000.00	$ 2,000.00
	SUB-TOTAL				**$ 526,332.50**
Opinion of Probable Cost					**$ 526,332.50**

Location Map

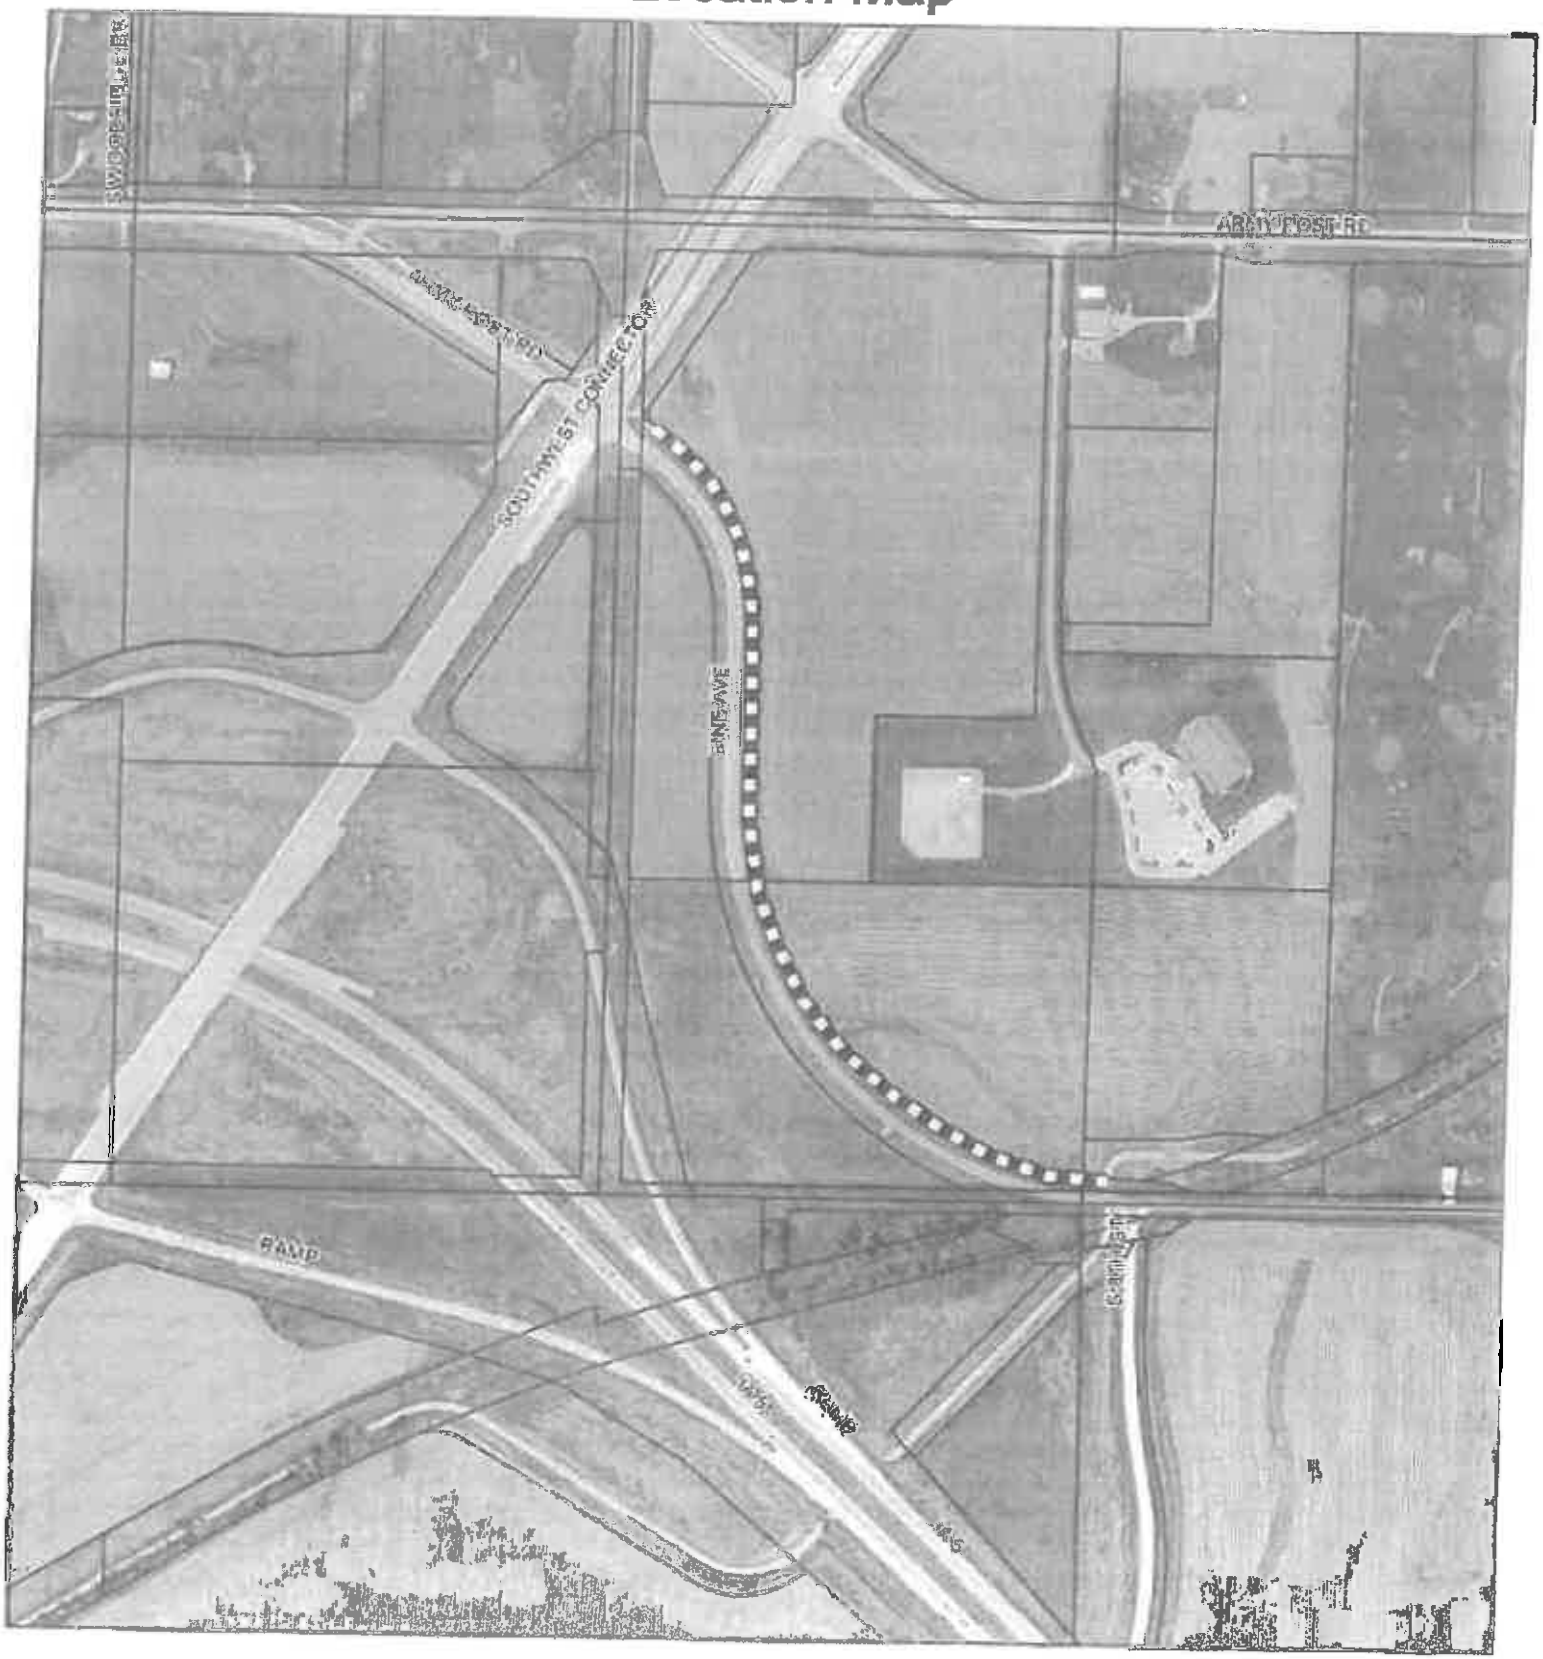

N

To the best of our knowledge the information included in this document is correct. The City of West Des Moines makes no warranty as to the accuracy of the information.

Legend

Project Location

SW Connector Phase 4
0510-021-2013
Shared Use Trail

0 250 500 1,000 Feet