CITY OF WEST DES MOINES
CITY COUNCIL MEETING COMMUNICATION

DATE: June 11, 2018

ITEM:

Public Hearing (5:35 p.m.)
Veterans Parkway – SW Wild Rose Lane to SW Grand Prairie Parkway

FINANCIAL IMPACT:

The revised Engineering Estimate of Construction Cost was estimated to be $5,237,415.00 for Veterans Parkway – SW Wild Rose Lane to SW Grand Prairie Parkway. There were seven (7) bids submitted with the low bid of $2,824,538.58 being submitted by McAninch Corporation of Des Moines, Iowa. Payments will be made from account no. 500.000.000.5250.490 with the ultimate funding intended to come from Osmium Renewal Area TIF.

BACKGROUND:

The project will include construction of Veterans Parkway from SW Wild Rose Lane to SW Grand Prairie Parkway including grading and drainage improvements to support an ultimate 4-lane divided rural cross section roadway without curb and gutter. Initial paving will only include two lanes. All earthwork and the reinforced concrete box culvert are anticipated to be completed no later than December 1, 2018. The remainder of the storm sewer, paving, and site restoration is anticipated to be completed no later than September 27, 2019.

This agenda item was distributed to the Public Services Subcommittee by e-mail only since there was no meeting.

OUTSTANDING ISSUES: None.

RECOMMENDATION:

City Council Adopt:

- Resolution adopting Plans, Specifications, Form of Contract, and Estimate of Costs for Veterans Parkway – SW Wild Rose Lane to SW Grand Prairie Parkway;
- Motion receiving and filing Report of Bids;
- Resolution waiving bid irregularities and awarding the construction contract to McAninch Corporation.

Lead Staff Member: Brian J. Hemesath, P.E., City Engineer BJH

STAFF REVIEWS

Department Director	Brian J. Hemesath, P.E., City Engineer
Appropriations/Finance	Tim Stiles, Finance Director
Legal	Richard Scieszinski, City Attorney JBW
Agenda Acceptance	

PUBLICATION(S) (if applicable)

Published In	Des Moines Register
Dates(s) Published	June 1, 2018

SUBCOMMITTEE REVIEW (if applicable)

Committee			
Date Reviewed			
Recommendation	Yes	No	Split

RESOLUTION APPROVING ADOPTING PLANS, SPECIFICATIONS, FORM OF CONTRACT, AND ESTIMATE OF COST

WHEREAS, on May 14, 2018, Plans, Specifications, Form of Contract, and Estimate of Cost were filed with the City Clerk for the following described public improvement:

Veterans Parkway – SW Wild Rose Lane to SW Grand Prairie Parkway
Project No. 0510-011-2017

and,

WHEREAS, notice of hearing on Plans, Specifications, Form of Contract, and Estimate of Cost for said public improvements were published as required by law;

therefore,

BE IT FURTHER RESOLVED BY THE CITY COUNCIL OF THE CITY OF WEST DES MOINES, that the Plans, Specifications, Form of Contract, and Estimate of Costs for said Public Improvement are hereby approved.

PASSED AND APPROVED on this **11th** day of **June, 2018.**

_____
Steven K. Gaer, Mayor

ATTEST:

_____
Ryan T. Jacobson, City Clerk

RESOLUTION APPROVING THE AWARDING OF A CONTRACT

WHEREAS, the City Council of the City of West Des Moines has heretofore directed advertisement for bids for the following described public improvement:

Veterans Parkway – SW Wild Rose Lane to SW Grand Prairie Parkway
Project No. 0510-011-2017

and,

WHEREAS, bids have been received and opened by the City Clerk and placed on file by the City Council; and,

WHEREAS, an irregularity was noted on one of the bids that was received; and,

WHEREAS, the irregularity noted was not substantive in nature; and,

WHEREAS, the bid of McAninch Corporation in the amount of $2,824,538.58 was the lowest responsible bid received for said public improvement;

therefore,

BE IT RESOLVED BY THE CITY COUNCIL OF THE CITY OF WEST DES MOINES, IOWA, waives the irregularities in the bids that were received.

BE IT FURTHER RESOLVED BY THE CITY COUNCIL OF THE CITY OF WEST DES MOINES, IOWA, that a contract for the Veterans Parkway – SW Wild Rose Lane to SW Grand Prairie Parkway is hereby awarded to McAninch Corporation in the amount of $2,824,538.58 and the bond of said bidder for the project is hereby fixed in the same amount.

BE IT FURTHER RESOLVED that the City Engineer is authorized and directed to return bid bond(s) and/or check(s) to any unsuccessful bidder.

BE IT FURTHER RESOLVED that work on said project may commence as soon as the final contract and bond have been approved by the City Engineer and have been signed by the City Clerk and after the contractor is given a written notice to proceed by the City Engineer.

PASSED AND ADOPTED on this **11th** day of **June, 2018.**

_____
Steven K. Gaer, Mayor

ATTEST:

_____
Ryan T. Jacobson, City Clerk

SHIVEHATTERY
ARCHITECTURE + ENGINEERING

Client: City of West Des Moines
Project Name: Veterans Parkway SW Grand Prairie Parkway to SW Wild Rose Lane

Bid Date: June 6, 2018
WDM Project No.: 0510-011-2017
SH Project No.: 4164500

Item Number	Item Code	Description	Estimated Quantity	Units	McAninch Corporation Des Moines, Iowa		Concrete Technologies Inc Grimes, Iowa		Peterson Contractors Inc Reinback, Iowa		Elder Corporation Des Moines, Iowa		Corell Contractor Inc West Des Moines, Iowa		Alliance Construction Group Grimes, Iowa		CJ Moyna & Sons, Inc Elkader, Iowa		Engineer's Estimate	
		Bid Security			x		x		x		x		x		x		x			
		Addenda			x		x		x		x		x		x		x			
		Bidder Status Form			x		x		x		x		x		x		x			
					Unit Price	Amount	Unit Price	Amount	Unit Price	Amount	Unit Price	Amount	Unit Price	Amount	Unit Price	Amount	Unit Price	Amount	Unit Price	Amount
1	2010-B-1000	CLEARING AND GRUBBING	ACRE	3.5	$6,630.00	$23,205.00	$6,530.00	$22,855.00	$6,500.00	$22,750.00	$9,000.00	$31,500.00	$16,400.00	$64,400.00	$7,000.00	$24,500.00	$8,600.00	$24,150.00	$10,000.00	$35,000.00
2	2010-D-1000	TOPSOIL, ON-SITE	CY	30,884	$2.51	$77,016.84	$2.80	$85,915.20	$3.80	$116,599.20	$5.00	$153,420.00	$5.00	$153,420.00	$2.80	$85,915.20	$8.50	$260,814.00	$6.00	$184,104.00
3	2010-E-1010	EXCAVATION, CL 10, RDWY+BORROW	CY	132,678	$1.92	$254,741.76	$2.15	$285,257.70	$2.50	$331,695.00	$2.50	$331,695.00	$3.25	$431,203.50	$2.16	$286,257.70	$4.30	$570,015.40	$5.00	$663,390.00
4	2010-O-1012	SUBGRADE REPARATION, 12 IN.	SY	16,500	$2.63	$43,395.00	$2.90	$47,850.00	$2.35	$38,775.00	$2.25	$37,125.00	$2.50	$41,250.00	$3.00	$49,500.00	$2.90	$47,850.00	$3.00	$49,500.00
5	2010-H-1000	SUBGRADE TREATMENT	SY	3,300	$6.91	$22,803.00	$7.20	$23,760.00	$21.25	$70,125.00	$9.00	$29,700.00	$10.00	$33,000.00	$7.50	$24,750.00	$11.50	$37,950.00	$5.00	$16,500.00
6	4020-A-1018	STORM SWR, G-MAIN, TRENCHED, RCP CLASS IV, 18 IN.	LF	223	$115.00	$25,645.00	$116.00	$25,868.00	$75.90	$16,925.70	$55.00	$12,265.00	$85.00	$14,495.00	$125.00	$27,875.00	$70.00	$15,610.00	$75.00	$16,725.00
7	4020-A-1030	STORM SWR, G-MAIN, TRENCHED, RCP CLASS IV, 30 IN.	LF	198	$152.00	$30,096.00	$153.00	$30,294.00	$121.20	$23,997.60	$85.00	$16,830.00	$110.00	$21,780.00	$155.00	$30,690.00	$102.00	$20,196.00	$160.00	$31,680.00
8	4020-A-5030	STORM SWR, G-MAIN, TRENCHED, CMP, 30 IN. POLYMER COATED	LF	307	$112.00	$34,384.00	$113.00	$34,691.00	$113.05	$34,706.35	$115.00	$35,305.00	$80.00	$24,560.00	$115.00	$35,305.00	$83.00	$25,481.00	$250.00	$76,750.00
9	4020-A-5042	STORM SWR, G-MAIN, TRENCHED, CMP, 42 IN. POLYMER COATED	LF	247	$136.00	$33,592.00	$137.00	$33,839.00	$104.95	$25,922.65	$135.00	$33,345.00	$102.00	$25,194.00	$140.00	$34,580.00	$100.00	$24,700.00	$300.00	$74,100.00
10	4030-B-1018	APRON, CONCRETE, 18 IN.	EACH	3	$2,122.00	$6,366.00	$3,132.00	$9,396.00	$1,200.00	$3,600.00	$1,900.00	$5,700.00	$2,075.00	$6,225.00	$2,200.00	$6,600.00	$220.00	$660.00	$1,500.00	$4,500.00
11	4030-B-1030	APRON, CONCRETE, 30 IN.	EACH	1	$2,782.00	$2,782.00	$2,795.00	$2,795.00	$1,800.00	$1,800.00	$2,400.00	$2,400.00	$3,700.00	$3,700.00	$2,800.00	$2,800.00	$3,000.00	$3,000.00	$3,000.00	$3,000.00
12	4030-B-5030	APRON, CMP, 30"	EACH	1	$793.00	$793.00	$800.00	$800.00	$650.00	$650.00	$800.00	$800.00	$100.00	$100.00	$825.00	$825.00	$700.00	$700.00	$1,000.00	$1,000.00
13	4030-B-5042	APRON, CMP, 42"	EACH	1	$1,250.00	$1,250.00	$1,255.00	$1,255.00	$1,150.00	$1,150.00	$1,250.00	$1,250.00	$1,500.00	$1,500.00	$1,300.00	$1,300.00	$1,200.00	$1,200.00	$1,500.00	$1,500.00
14	SPECIAL	FIELD TILE REPAIR AND FITTINGS, PVC, UNSPECIFIED DIA.	LF	1,000	$19.00	$19,000.00	$19.00	$19,000.00	$22.60	$22,600.00	$30.00	$30,000.00	$17.00	$17,000.00	$20.00	$20,000.00	$25.00	$25,000.00	$25.00	$25,000.00
15	SPECIAL	LOCATING TILE LINES	STA	45	$428.40	$19,278.00	$470.00	$21,150.00	$165.00	$7,425.00	$250.00	$11,250.00	$225.00	$10,125.00	$475.00	$21,375.00	$200.00	$9,000.00	$500.00	$22,500.00
16	4040-A-1006	SUBDRAIN, 6 IN. PVC, TYPE-7A	LF	8,740	$9.95	$86,963.00	$9.80	$85,652.00	$7.75	$67,735.00	$11.00	$96,140.00	$14.30	$124,982.00	$13.50	$117,990.00	$12.00	$104,880.00	$15.00	$131,100.00
17	4040-A-2006	SUBDRAIN, 6 IN., PVC, TYPE-11	LF	760	$11.00	$8,360.00	$10.80	$8,632.00	$29.25	$23,107.50	$21.00	$16,590.00	$23.00	$18,170.00	$30.00	$23,700.00	$16.00	$12,640.00	$25.00	$19,750.00
18	4040-D-1000	SUBDRAIN, OUTLETS AND CONNECTIONS	EACH	20	$295.00	$5,900.00	$291.00	$5,820.00	$240.00	$4,800.00	$450.00	$9,000.00	$500.00	$10,000.00	$500.00	$10,000.00	$275.00	$5,500.00	$500.00	$10,000.00
19	6010-B-1513	INTAKE, SW-513, 5 X 5'	EACH	2	$9,483.00	$18,966.00	$9,530.00	$19,060.00	$7,015.00	$14,030.00	$5,600.00	$11,200.00	$7,000.00	$14,000.00	$10,000.00	$20,000.00	$7,000.00	$14,000.00	$6,000.00	$12,000.00
20	7010-A-1010	PAVEMENT, REINFORCED PCC, CLASS C-SUD, 9 IN.	SY	13720	$38.75	$531,650.00	$38.00	$521,360.00	$38.00	$521,360.00	$38.00	$521,360.00	$38.75	$531,650.00	$53.00	$727,160.00	$38.00	$521,360.00	$55.00	$754,600.00
21	7010-J-1000	GRANULAR SURFACING	TON	633	$36.00	$22,788.00	$36.25	$22,946.25	$34.15	$21,618.95	$28.00	$17,724.00	$30.00	$18,990.00	$37.00	$23,421.00	$21.20	$13,419.60	$30.00	$18,990.00
22	SPECIAL	GRANULAR SURFACING - ROAD REPAIR AND MAINTENANCE	TON	6000	$19.15	$114,900.00	$19.25	$115,500.00	$20.00	$120,000.00	$30.00	$180,000.00	$19.00	$114,000.00	$19.50	$117,000.00	$13.70	$82,200.00	$30.00	$180,000.00
23	SPECIAL	GRANULAR SHOULDERS, TYPE B	TON	3220	$24.05	$77,441.00	$25.00	$80,500.00	$22.20	$71,484.00	$30.00	$96,600.00	$22.00	$70,840.00	$25.00	$80,500.00	$24.20	$77,924.00	$25.00	$80,500.00
24	SPECIAL	COLD WEATHER PROTECTION, CLASS C-SUD PCC PAVING	SY	1300	$6.40	$8,320.00	$6.25	$8,125.00	$6.25	$8,125.00	$6.50	$8,450.00	$6.35	$8,255.00	$8.00	$10,400.00	$6.25	$8,125.00	$10.00	$13,000.00
25	6020-B-1000	PAINTED PAVEMENT MARKINGS, SOLVENT/WATERBORNE	STA	168	$17.10	$2,872.80	$37.20	$6,249.60	$37.00	$6,216.00	$16.75	$2,814.00	$41.00	$6,888.00	$45.00	$7,560.00	$37.00	$6,216.00	$35.00	$5,880.00
26	8030-A-1000	TRAFFIC CONTROL	LS	1	$106,050.00	$106,050.00	$100,500.00	$100,500.00	$5,850.00	$5,850.00	$1,000.00	$1,000.00	$4,785.00	$4,785.00	$120,000.00	$120,000.00	$85,000.00	$85,000.00	$10,000.00	$10,000.00
27	9010-A-1020	CONVENTIONAL SEEDING, FERTILIZING, TYPE 2	ACRE	10	$714.00	$7,140.00	$703.00	$7,030.00	$700.00	$7,000.00	$700.00	$7,000.00	$770.00	$7,700.00	$725.00	$7,250.00	$700.00	$7,000.00	$1,000.00	$10,000.00
28	9010-A-1050	HYDRAULIC SEEDING, FERTILIZING, TYPE 2	ACRE	10	$714.00	$7,140.00	$703.00	$7,030.00	$700.00	$7,000.00	$700.00	$7,000.00	$770.00	$7,700.00	$725.00	$7,250.00	$700.00	$7,000.00	$1,200.00	$12,000.00
29	9010-A-1050	CONVENTIONAL SEEDING, FERTILIZING, TYPE 5	ACRE	40	$102.00	$4,080.00	$100.50	$4,020.00	$100.00	$4,000.00	$100.00	$4,000.00	$110.00	$4,400.00	$125.00	$5,000.00	$100.00	$4,000.00	$800.00	$32,000.00
30	9010-B-1050	HYDRAULIC SEEDING, FERTILIZING, TYPE 5	ACRE	40	$102.00	$4,080.00	$100.50	$4,020.00	$100.00	$4,000.00	$100.00	$4,000.00	$110.00	$4,400.00	$125.00	$5,000.00	$100.00	$4,000.00	$1,000.00	$40,000.00
31	9040-A-1000	SWPPP PREPARATION	LS	1	$2,040.00	$2,040.00	$2,010.00	$2,010.00	$3,500.00	$3,500.00	$1,000.00	$1,000.00	$2,200.00	$2,200.00	$2,500.00	$2,500.00	$2,000.00	$2,000.00	$5,000.00	$5,000.00
32	9040-A-2000	SWPPP MANAGEMENT	LS	1	$4,080.00	$4,080.00	$4,020.00	$4,020.00	$4,000.00	$4,000.00	$1,000.00	$1,000.00	$4,400.00	$4,400.00	$4,200.00	$4,200.00	$4,000.00	$4,000.00	$10,000.00	$10,000.00
33	9040-D-1000	FILTER SOCK, 9 IN.	LF	1750	$1.53	$2,677.50	$1.50	$2,625.00	$1.50	$2,625.00	$1.60	$2,625.00	$1.65	$2,887.50	$1.55	$2,712.50	$1.50	$2,625.00	$2.00	$3,500.00
34	9040-D-2000	REMOVAL OF FILTER SOCK	LF	1750	$0.05	$87.50	$0.05	$87.50	$0.05	$87.50	$0.05	$87.50	$0.10	$175.00	$0.10	$175.00	$0.05	$87.50	$1.50	$2,625.00
35	9040-E-1000	TEMPORARY RCP, TYPE 2C	SY	62503	$1.18	$73,755.90	$1.20	$75,006.00	$1.18	$73,753.54	$1.15	$71,880.75	$1.15	$71,880.75	$1.25	$78,131.25	$1.18	$73,753.54	$15.00	$937,575.00
36	9040-J-1000	RIP-RAP, CLASS D	TON	3500	$48.55	$169,925.00	$50.00	$175,000.00	$46.00	$161,000.00	$60.00	$210,000.00	$57.00	$199,500.00	$50.00	$175,000.00	$46.10	$161,350.00	$65.00	$227,500.00
37	9040-J-2000	EROSION STONE	TON	290	$38.50	$11,165.00	$39.75	$11,527.50	$37.85	$10,978.50	$45.00	$13,050.00	$61.00	$17,690.00	$40.00	$11,600.00	$39.90	$11,571.00	$60.00	$17,400.00
38	9040-C-1000	CHECK DAM, ROCK	TON	55	$69.00	$3,795.00	$72.50	$3,987.50	$74.00	$4,070.00	$45.00	$2,475.00	$85.00	$4,675.00	$75.00	$4,125.00	$68.40	$3,762.00	$70.00	$3,850.00
39	9040-N-1000	SILT FENCE OR SILT FENCE DITCH CHECK	LF	17500	$1.53	$26,775.00	$1.50	$26,250.00	$1.50	$26,250.00	$1.50	$26,250.00	$1.65	$28,875.00	$1.55	$27,125.00	$1.50	$26,250.00	$2.00	$35,000.00
40	9040-N-2000	SILT FENCE OR SILT FENCE DITCH CHECK, REMOVAL OF SEDIMENT	LF	8750	$0.01	$87.50	$0.01	$87.50	$0.01	$87.50	$0.01	$87.50	$0.01	$87.50	$0.10	$875.00	$0.01	$87.50	$1.00	$8,750.00
41	9040-N-3000	SILT FENCE OR SILT FENCE DITCH CHECK, REMOVAL OF DEVICE	LF	17500	$0.05	$875.00	$0.05	$875.00	$0.05	$875.00	$0.05	$875.00	$0.05	$875.00	$0.10	$1,750.00	$0.05	$875.00	$0.50	$8,750.00
42	9040-0-1000	STABILIZED CONSTRUCTION ENTRANCE	SY	670	$13.60	$9,112.00	$14.00	$9,380.00	$25.00	$16,750.00	$30.00	$20,100.00	$18.00	$12,060.00	$14.00	$9,380.00	$12.80	$8,576.00	$30.00	$20,100.00
43	SPECIAL	TEMPORARY CONSTRUCTION ACCESS ROAD MAINTENANCE	LS	1	$25,000.00	$25,000.00	$27,630.00	$27,630.00	$45,445.00	$45,445.00	$1,000.00	$1,000.00	$8,700.00	$8,700.00	$50,000.00	$50,000.00	$2,500.00	$2,500.00	$20,000.00	$20,000.00
44	9040-P-1000	DUST CONTROL, WATER	MGAL	200	$81.00	$16,200.00	$89.00	$17,800.00	$60.00	$12,000.00	$60.00	$12,000.00	$33.00	$6,600.00	$90.00	$18,000.00	$30.00	$6,000.00	$30.00	$6,000.00
45	9040-Q-1000	EROSION CONTROL MULCHING, CONVENTIONAL	ACRE	40	$459.00	$18,360.00	$455.00	$18,200.00	$450.00	$18,000.00	$450.00	$18,000.00	$495.00	$19,800.00	$475.00	$19,000.00	$450.00	$18,000.00	$500.00	$20,000.00
46	9040-Q-2000	EROSION CONTROL MULCHING, HYDROMULCH	ACRE	40	$1,530.00	$61,200.00	$1,510.00	$60,400.00	$1,500.00	$60,000.00	$1,500.00	$60,000.00	$1,650.00	$66,000.00	$1,600.00	$64,000.00	$1,500.00	$60,000.00	$1,200.00	$48,000.00
47	9050-A-1072	CHAIN LINK FENCE, 72 IN.	LF	220	$62.00	$13,640.00	$56.50	$12,430.00	$61.20	$13,464.00	$56.00	$12,320.00	$62.00	$13,640.00	$60.00	$13,200.00	$72.00	$15,840.00	$65.00	$14,300.00
48	9050-B-1030	GATES, FIELD FENCE	EACH	5	$1,100.00	$5,500.00	$804.00	$4,020.00	$1,075.00	$5,375.00	$1,200.00	$6,000.00	$1,320.00	$6,600.00	$1,250.00	$6,250.00	$1,500.00	$7,500.00	$500.00	$2,500.00
49	SPECIAL	FIELD FENCE	LF	8320	$7.90	$65,728.00	$6.00	$49,920.00	$7.75	$64,480.00	$7.00	$58,240.00	$11.00	$91,520.00	$10.00	$83,200.00	$6.50	$54,080.00	$10.00	$83,200.00
50	9050-E-1000	REMOVAL OF FENCE	LF	1354	$1.53	$2,071.62	$1.25	$1,692.50	$3.00	$4,062.00	$3.00	$4,062.00	$3.30	$4,468.20	$3.25	$4,400.50	$3.50	$4,739.00	$3.00	$4,062.00
51	SPECIAL	TEMPORARY STREAM DIVERSION	LS	1	$10,000.00	$10,000.00	$11,050.00	$11,050.00	$30,000.00	$30,000.00	$990.65	$990.65	$29,000.00	$29,000.00	$15,000.00	$15,000.00	$5,500.00	$5,500.00	$16,000.00	$15,000.00
52	SPECIAL	TEMPORARY SEDIMENT TRAP	LS	1	$20,100.00	$20,100.00	$22,305.00	$22,305.00	$30,300.00	$30,300.00	$8,150.00	$8,150.00	$24,000.00	$24,000.00	$23,000.00	$23,000.00	$60,000.00	$60,000.00	$25,000.00	$25,000.00
53	SPECIAL	TEMPORARY SEDIMENT TRAP MAINTENANCE	LS	1	$8,000.00	$8,000.00	$8,750.00	$8,750.00	$20,000.00	$20,000.00	$8,150.00	$8,150.00	$13,500.00	$13,500.00	$9,000.00	$9,000.00	$1,500.00	$1,500.00	$10,000.00	$10,000.00
54	11010-A-1000	CONSTRUCTION SURVEY	LS	1	$19,700.00	$19,700.00	$19,400.00	$19,400.00	$26,150.00	$26,150.00	$5,000.00	$5,000.00	$25,000.00	$25,000.00	$25,000.00	$25,000.00	$65,000.00	$65,000.00	$35,000.00	$35,000.00
55	11060-A-1000	CONCRETE WASHOUT	LS	1	$7,100.00	$7,100.00	$1,000.00	$1,000.00	$10,000.00	$10,000.00	$1,000.00	$1,000.00	$5,500.00	$5,500.00	$8,000.00	$8,000.00	$6,500.00	$6,500.00	$5,000.00	$5,000.00
56	2403-0100020	STRUCTURAL CONCRETE (RCB CULVERT)	CY	1050	$463.00	$486,150.00	$456.25	$479,062.50	$454.00	$476,700.00	$454.00	$476,700.00	$463.00	$486,150.00	$470.00	$493,500.00	$454.00	$476,700.00	$710.00	$745,500.00
57	2404-7775000	REINFORCING STEEL	LB	129578	$1.22	$158,085.16	$1.25	$161,972.50	$1.20	$155,493.60	$1.20	$155,493.60	$1.22	$158,085.16	$1.25	$161,972.50	$1.20	$155,493.60	$3.00	$388,734.00
		TOTAL BID				$2,824,538.58		$2,847,559.25		$2,879,184.85		$2,892,000.00		$3,098,581.61		$3,242,600.65		$3,262,133.40		$5,237,415.00

I hereby certify that this document was prepared by me or under my direct personal supervision and that I am a duly licensed Professional Engineer under the laws of the State of Iowa.

Jun 6 2018 4:38 PM

Name: Nathan T. Hardisty, PE
22587

Irregularity Calculation of extended price does not match proposal

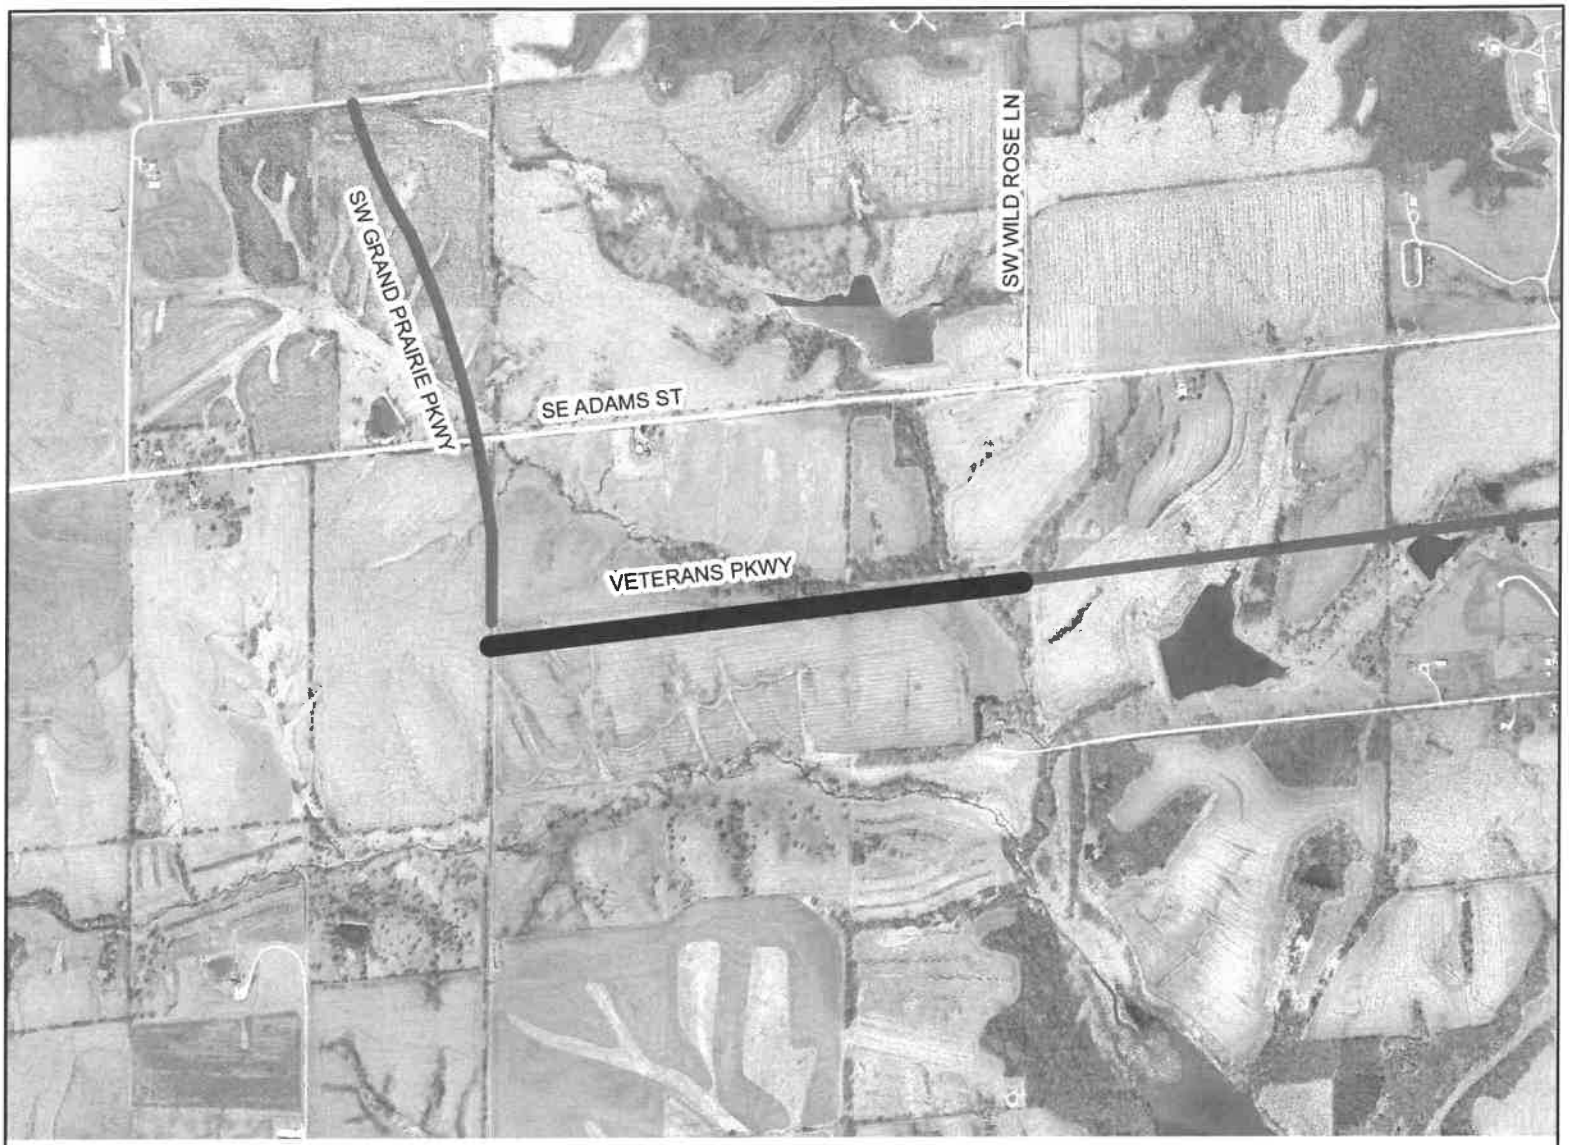

VICINITY MAP

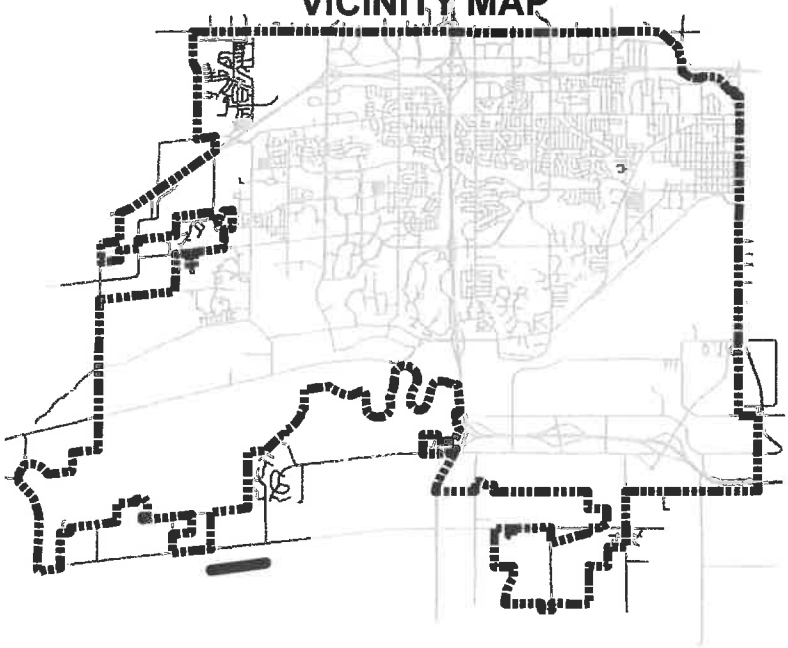

LEGEND

PROJECT LOCATION

N
W E
S

THE CITY OF WEST DES MOINES	PROJECT:	**Veterans Parkway**		
	LOCATION:	**SW Wild Rose Lane to SW Grand Prairie Parkway**		
	DRAWN BY: JDR	DATE: 9/13/16	PROJECT: 0510-011-2017	SHT. 1 of 1